


## 781 BREATHER / DRAIN PLUG, GLOBALLY APPROVED, EXPLOSIVE ATMOSPHERE CABLE / CONDUIT ACCESSORY

Type E



Type D



- 781E for Ex e use
- 781D for Ex d use
- Drains equipment susceptible to moisture collection
- Enables equipment to breathe
- General purpose / industrial version available
- Nylon Ex e only version available (-20°C to +60°C)
- -60°C to +130°C (metallic versions)
- Globally marked, UKEX, IECEx, ATEX and cCSAus
- The 781D can be used with enclosures up to 30 litres for group IIB gases and enclosures up to 2.5 litres for group IIC gases
- No enclosure volume restrictions apply to 781E




TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass & Stainless Steel Only
INGRESS PROTECTION RATING	781D: IP66 (when fitted with sealing accessories) 781E: IP66 (with o-ring interface seal and lock nut as standard)
AVAILABLE MATERIALS	Brass, Nickel Plated Brass, Aluminium, Stainless Steel, Nylon (781E only)
CONTINUOUS OPERATING TEMPERATURE	781D: -60°C to +130°C 781E: -60°C to +130°C (-20°C to +60°C Nylon)
ACCESSORIES INCLUDED (781E ONLY)	Integral Entry Thread equipment interface o-ring seal, Castellated Locknut


The 781D can be used with enclosures up to 30 litres for group IIB gases and enclosures up to 2.5 litres for group IIC gases. No enclosure volume restrictions apply to 781E.

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML 18ATEX1330U	IECEx CERTIFICATE	IECEx CML 18.0187U
UKEX CERTIFICATE	CML 21UKEX1241U		
CODE OF PROTECTION	781D: Ex d IIC Gb, Ex ta IIIC Da 781E: Ex e II, Class I, Zone 1, AEx e II, Enclosure Type 4X	CODE OF PROTECTION	781D: Ex db IIC Gb, Ex ta IIIC Da 781E: Ex eb IIC Gb, Ex ta IIIC Da
COMPLIANCE STANDARDS	EN 60079-0,1,7,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,31
cCSAus CERTIFICATE (20S16 - 100)	1055233	UL CERTIFICATE	E253914
CODE OF PROTECTION	781D: Ex d IIC, Class I, Zone 1 AEx d IIC; Class I Div 1, Groups A,B,C,D, Enclosure Type 4X 781E: Ex e II, Class I, Zone 1, AEx e II, Enclosure Type 4X	CODE OF PROTECTION	781D: Class I, Zone 1, AEx d IIB or IIC; Zone 20, AEx ta IIIC 781E: Class I, Zone 1, AEx e IIC
COMPLIANCE STANDARDS	CSA C22.2 No 0-10, 0.5, 30, 94; CSA C22.2 60079-0,1,7, E61241-1-1, UL50, 1203, UL60079-0,1,7	COMPLIANCE STANDARDS	UL 60079-0, 1, 7, 31
EAC CERTIFICATE	RU C-GBA07.B.02492/20		
COMPLIANCE STANDARDS	1Ex d IIC Gb X, 1Ex e IIC Gb X, 2Ex nR IIC Gc X, Ex ta IIIC Da X, IP66, IP67, IP68		
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
ECAS CERTIFICATE	20-02-05264	Ukr SEPRO CERTIFICATE	CU 19.0370U
MARINE APPROVALS	LRS: 01/00173	KCS CERTIFICATE	781E: 19-AV4B0-0255X, 781D: 19-AV4B0-0254X
INMETRO APPROVAL	TUV 121330U		
SANS	IA S-XPL21962 21.0304U		

781D

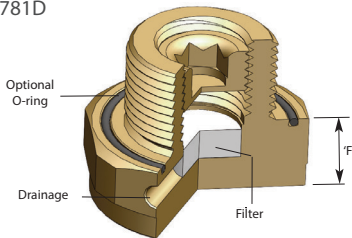

781E

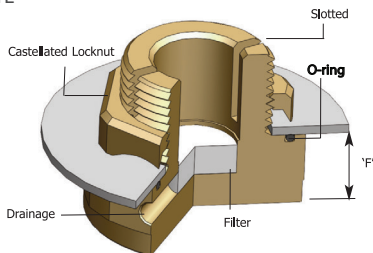

PRODUCT SELECTION TABLE						
EUTEX ORDERING REFERENCE (781D)	EUTEX ORDERING REFERENCE (781E)	THREAD SIZE	MINIMUM THREAD LENGTH	PROTRUSION LENGTH 'F'	ACROSS FLATS DIMENSION	ACROSS CORNERS DIMENSIONS
781DM2	781EM2	M20 x 1.5	15.0	12.7	30.0	33.0
781DM3	781EM3	M25 x 1.5	15.0	12.7	36.0	39.6
781DT1	781ET1	½" NPT	19.9	12.7	30.0	33.0
781DT2	781ET2	¾" NPT	20.2	12.7	36.0	39.6

All dimensions shown are in millimetres unless otherwise stated

Dimensions listed are for metric accessories only. Dimensions for alternative threads may vary.