

A2FRC GLOBALLY APPROVED, RIGID & FLEXIBLE CONDUIT EXPLOSIVE ATMOSPHERE CABLE GLAND



IP66	+130°C -60°C	Ex db	Ex eb
		Ex ta	Ex nR

FOR ALL TYPES OF UNARMoured & BRAIDED CABLES HOUSED IN CONDUIT

- Designed for rigid and flexible conduits (when used with a conduit fitting)
- Easy install running coupler design
- Displacement type flameproof seal
- -60°C to +130°C
- Globally marked, UKEX, IECEx, ATEX and CSA

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1321X, CML18ATEX4313X	IECEx CERTIFICATE	IECEx CML 18.0179X
UKEX CERTIFICATE	CML 21UKEX1245X, CML 21UKEX4246X		
CODE OF PROTECTION	II 2G 1D Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIC Da II 3G Ex nR IIC Gc	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIC Da
COMPLIANCE STANDARDS	EN 60079-0,1,7,15,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,15,31
CSA CERTIFICATE	1211841		
CODE OF PROTECTION	Ex d IIC, Ex e II, Ex nR II, Enclosure Type 4x		
COMPLIANCE STANDARDS	C22.2 No 0,0,4, 94, 174, CAN/CSA-60079-0,1,7,15		
EAC CERTIFICATE	RU C-GB.A07.B.02519/20	UkrSEPRO CERTIFICATE	CQ 19.0371X
KCS KOSHA CERTIFICATE	19-AV4B0-0471X ; 19-AV4B0-0472X ; 19-AV4B0-0473X	ECAS CERTIFICATE	20-02-05362
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
CCC CERTIFICATE	2020322313002951	INMETRO APPROVAL	TÜV 211075X
SANS	IA S-XPL21804 21.0008X		
MARINE APPROVALS	LRS: 01/00172, DNV: TAE000000Y, BV: 43180, ABS: 17-LD1619350-PDA		


TECHNICAL DATA	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Type B
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
INGRESS PROTECTION RATING**	IP66
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium
SEAL MATERIAL	SOLO LSF Halogen Free Thermoset Elastomer
CABLE TYPE	Unarmoured & Braided when terminated inside enclosure
SEALING TECHNIQUE	Displacement Seal
SEALING AREA(S)	Cable Outer Sheath

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444
* Alternative conduit sizes available upon request. See 'thread option ordering examples' table below for typical NPT and Metric thread ordering references



THREAD OPTION ORDERING EXAMPLES		
ORDERING REFERENCE	MALE THREAD	FEMALE THREAD
20A2FRCIRA	M20	M20
20A2FRCIRA031	M20	½" NPT
20A2FRCIRA03131	½" NPT	½" NPT
20A2FRCIRA03102†	½" NPT	M20

Refer to 'How to order' page for complete list of ordering codes. † For Metric female threads please insert '0' before thread size code e.g. 32A2FRCIRA53405 (1 ½" NPT Male x M40 Female)

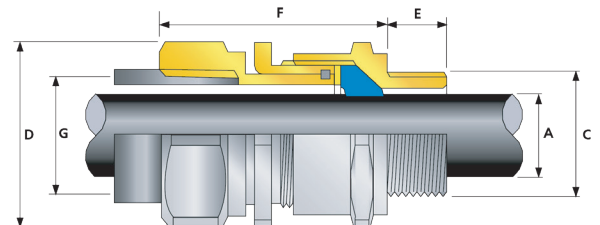

EUTEX ORDERING REFERENCE (*BRASS METRIC MALE AND FEMALE)	AVAILABLE ENTRY THREADS 'C' (ALTERNATIVE METRIC THREAD LENGTHS AVAILABLE)					FEMALE CONNECTION THREAD 'G'	FEMALE CONNECTION THREAD (NPT) 'G'	OVERALL CABLE DIAMETER 'A'		ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
	STANDARD				OPTION			MIN	MAX	MAX	MAX			
	METRIC	THREAD LENGTH (METRIC) 'E'	NPT	THREAD LENGTH (NPT) 'E'										
20S16 A2FRC	M20	15.0	½"	19.9	¾"	M20	½"	3.2	8.7	24.0	26.4	46.9	PVC04	0.110
20S A2FRC	M20	15.0	½"	19.9	¾"	M20	½"	6.1	11.7	24.0	26.4	46.1	PVC04	0.110
20 A2FRC	M20	15.0	½"	19.9	¾"	M20	½"	6.5	14.0	27.0	29.7	47.9	PVC05	0.110
25 A2FRC	M25	15.0	¾"	20.2	1"	M25	¾"	11.1	20.0	36.0	39.6	56.1	PVC09	0.200
32 A2FRC	M32	15.0	1"	25.0	1 ¼"	M32	1"	17.0	26.3	41.0	45.1	55.5	PVC10	0.240
40 A2FRC	M40	15.0	1 ¼"	25.6	1 ½"	M40	1 ¼"	23.5	32.2	50.0	55.0	57.7	PVC13	0.330
50S A2FRC	M50	15.0	1 ½"	26.1	2"	M50	1 ½"	31.0	38.2	55.0	60.5	59.1	PVC15	0.430
50 A2FRC	M50	15.0	2"	26.9	2 ½"	M50	2"	35.6	44.0	60.0	66.0	64.3	PVC18	0.440
63S A2FRC	M63	15.0	2"	26.9	2 ½"	M63	2"	41.5	49.9	70.5	77.6	61.6	PVC21	0.720
63 A2FRC	M63	15.0	2 ½"	39.9	3"	M63	2 ½"	47.2	55.9	75.0	82.5	71.0	PVC23	0.640
75S A2FRC	M75	15.0	2 ½"	39.9	3"	M75	2 ½"	54.0	61.9	84.0	92.4	70.1	PVC26	0.960
75 A2FRC	M75	15.0	3"	41.5	3 ½"	M75	3"	61.1	67.9	84.0	92.4	73.2	PVC30	0.860
90 A2FRC	M90	24.0	3 ½"	42.8	4"	M90	3 ½"	66.6	79.9	108.0	118.8	106.3	PVC31	2.250

*For material options add the following suffix to the ordering reference; Brass (no suffix required); Nickel Plated Brass '5'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1' For NPT male and / or female options please add the following digits to the material suffix (See Thread Options table above) ½" = 31, ¾" = 32, 1" = 33, 1 ¼" = 34, 1 ½" = 35, 2" = 36, 2 ½" = 37, 3" = 38, 3 ½" = 39, 4" = 310 (Brass requires prefix "0") NPT male & Metric female product option is required, please add the following digits to the material and NPT male suffix (See Thread Options table) M16 = 01, M20 = 02, M25 = 03, M32 = 04, M40 = 05, M50 = 06, M63 = 07, M75 = 08, M90 = 09 (Brass requires prefix "0")

Examples: 32A2FRCIRA533 = Nickel Plated Brass M32 male x 1" NPT female, 20S16A2FRCIRA031 = Brass M20 male x ½" NPT female, 25A2FRCIRA43203 = Stainless Steel ¾" NPT male x M25 female, 20A2FRCIRA5 = Nickel Plated Brass M20 male & female

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary