



C2KX GLOBALLY APPROVED, HAZARDOUS (CLASSIFIED) LOCATION CABLE GLAND

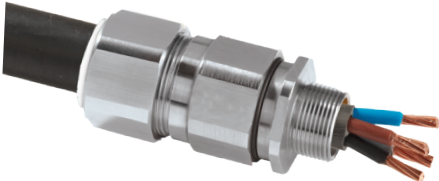


FOR ALL TYPES OF BRAIDED CABLES

- Metal-to-metal armor clamping
- Direct and remote installation
- Integral protected deluge seal
- Controlled outer load retention seal
- Unique OSTG prevents overtightening
- Integral protected deluge seal
- Standard:-60°C to +130°C (-76°F to +266°F)
- Globally marked, UL, cCSAus, IECEx, ATEX and UKEX
- Superior EMC performance
- VAR design available for VFD/VSD cables
- As standard in nickel plated brass with NPT thread form

CMP SOLO LSF HALOGEN FREE SHROUDS ALSO AVAILABLE ON REQUEST

TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Type D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
ELECTRICAL CLASSIFICATION*	Category B (Category A when used with braid, tape or pliable wire armor cables)
INGRESS PROTECTION RATING**	IP66, IP67 and IP68***
NEMA RATING**	NEMA 4X
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE TYPE	Braid Armored Shipboard cable and all IEC Braid Cables
ARMOR CLAMPING	Detachable Armor Cone and AnyWay Universal Clamping Ring
SEAL MATERIAL	SOLO LSF Halogen Free Thermoset Elastomer
SEALING TECHNIQUE	Load Retention Seal
SEALING AREA(S)	Cable Outer Jacket
CABLE GLAND MATERIAL	Electroless Nickel Plated Brass, Copper Free (<0.4%) Aluminum, Stainless Steel

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444
 *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request.

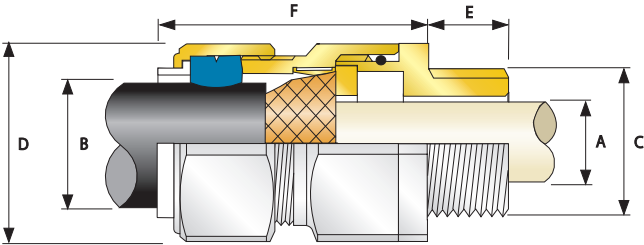

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1323X	IECEx CERTIFICATE	IECEx CML 18.0180X
UKEX CERTIFICATE	CML 21UKEX1251X		
CODE OF PROTECTION	II 2G 1D, Ex eb IIC Gb, Ex ta IIIC Da	CODE OF PROTECTION	Ex eb IIC Gb, Ex ta IIIC Da
COMPLIANCE STANDARDS	EN 60079-0,7,31	COMPLIANCE STANDARDS	IEC 60079-0,7,31
cCSAus CERTIFICATE (20S16 - 90)	2367109		
CSAus CODE OF PROTECTION	Class I, Zone I, AEx e II		
cCSA CODE OF PROTECTION	Ex e II		
COMPLIANCE STANDARDS	CAN/CSA-C22.2 No 0-10,18.3-04, 94.1-07, 94.2-07, CSA-E60079-0-11, CAN/CSA-E60079-7.0.3, ANSI/UL 514B, ANSI/UL 50, ANSI/UL 50E, ANSI/UL 2225, CAN/CSA C22.2 No. 60529:05, ANSI/UL 60079-0,7, IEC 60529 Ed. 2.1		
UL CERTIFICATE (20S16 - 90)	E 200163, E256367		
CODE OF PROTECTION	Class I, Zone I, AEx e II		
COMPLIANCE STANDARDS	UL 50, UL 514B, UL 2225, EN 50014, EN 50018, EN 60529		
ECAS CERTIFICATE	20-02-05625	UK:SEPRO CERTIFICATE	CQ 19.0371X
EAC CERTIFICATE	TC RU C-GB.AA87.B.00487		
CODE OF PROTECTION	IEx e IIC Gb X, Ex ta IIIC Da X, IP66, IP67, IP68		
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
CCC CERTIFICATE	2020322313003285		
SANS	IA S-XPL21804 21.0009X	INMETRO APPROVAL	TÜV 12.0617X
MARINE APPROVALS	LRS: 01/00172, DNV: TAE000000V, ABS: 16-LD1478091-PDA, BV: 43180		



EUTEX ORDERING REFERENCE (*NICKEL PLATED BRASS NPT)	AVAILABLE ENTRY THREADS 'C'			MINIMUM THREAD LENGTH 'E'	CABLE BEDDING DIAMETER 'A'	OVERALL CABLE DIAMETER 'B'		ARMOUR RANGE GROOVED CONE (X)		ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (oz)
	NPT	NPT (OPTION)	METRIC (OPTION)			MIN	MAX	MIN	MAX					
20S16C2KX	½"	¾"	M20	0.78	0.34	0.24	0.52	0.01	0.04	0.94	1.04	2.56	PVC04	8.19
20SC2KX	½"	¾"	M20	0.78	0.46	0.37	0.63	0.01	0.04	0.94	1.04	2.44	PVC04	7.96
20C2KX	½"	¾"	M20	0.78	0.55	0.49	0.82	0.02	0.04	1.20	1.32	2.48	PVC06	7.86
25SC2KX	¾"	1"	M25	0.80	0.79	0.55	0.87	0.02	0.05	1.48	1.62	2.74	PVC09	12.24
25C2KX	¾"	1"	M25	0.80	0.79	0.72	1.03	0.02	0.05	1.48	1.62	2.74	PVC09	12.24
32C2KX	1"	1 ¼"	M32	0.98	1.02	0.93	1.33	0.02	0.05	1.81	1.99	2.95	PVC11	19.47
40C2KX	1 ¼"	1 ½"	M40	1.01	1.27	1.10	1.59	0.02	0.06	2.17	2.38	2.95	PVC15	26.46
50SC2KX	1 ½"	2"	M50	1.03	1.50	1.39	1.84	0.02	0.06	2.36	2.60	3.03	PVC18	30.27
50C2KX	2"	2 ½"	M50	1.06	1.74	1.59	2.09	0.02	0.06	2.76	3.04	3.03	PVC21	40.00
63SC2KX	2"	2 ½"	M63	1.06	1.97	1.80	2.34	0.02	0.06	2.95	3.25	3.15	PVC23	46.77
63C2KX	2 ½"	3"	M63	1.57	2.21	2.15	2.59	0.02	0.06	3.15	3.46	3.15	PVC25	47.37
75SC2KX	2 ½"	3"	M75	1.57	2.44	2.32	2.83	0.02	0.06	3.54	3.90	3.43	PVC28	71.39
75C2KX	3"	3 ½"	M75	1.63	2.53	2.63	3.09	0.02	0.06	3.94	4.33	3.47	PVC30	87.41
90C2KX	3 ½"	4"	M90	1.69	3.09	3.00	3.56	0.03	0.06	4.50	4.95	4.02	PVC32	124.27
100C2KX	3 ½"	4"	M100	1.69	3.58	3.39	3.99	0.03	0.06	5.24	5.76	4.49	LSF33	101.13
*Note : For material options please change the suffix in the ordering reference ; Brass (no suffix required), Nickel Plated Brass "5" (as standard), 316 Grade Stainless Steel "4", Copper Free Aluminum "1" For NPT options please change the following digits after the material suffix ; ½" = 31, ¾" = 32, 1" = 33, 1 ¼" = 34, 1 ½" = 35, 2" = 36, 2 ½" = 37, 3" = 38, 3 ½" = 39, 4" = 310 (Brass requires prefix "0") Examples: 32C2KX1RA5 = Nickel Plated Brass 32mm, 32C2KX1RA1 = Copper Free Aluminum 32mm Dimensions are displayed in inches unless otherwise stated														