


PXSS2K DOUBLE SEAL, GLOBALLY APPROVED, EXPLOSIVE ATMOSPHERE BARRIER CABLE GLAND

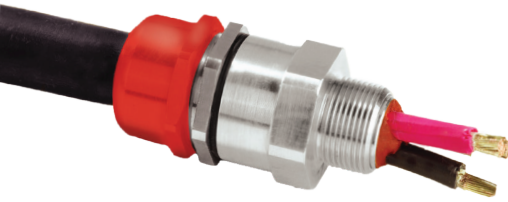


FOR ALL TYPES OF UNARMoured & BRAIDED CABLES

- Direct and remote installation
- Superior levels of cable retention
- Displacement type environmental seal
- Compound barrier type flameproof seal
- Deluge protected
- -60°C to +85°C
- Globally marked, UL, cCSAus, IECEx, ATEX and UKEX
- Compound barrier seals around internal cable cores after removing any inner cable sheath/bedding; completely eliminating any risk of coldflow

GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1325X, CML18ATEX4317X	IECEx CERTIFICATE	IECEx CML 18.0182X
UKEX CERTIFICATE	CML 21UKEX1214X, CML 21UKEX4215X		
CODE OF PROTECTION	⊕ II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da ⊕ II 3G, Ex nR IIC Gc, ⊕ I M2 Ex db I Mb*, Ex eb I Mb*	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb*, Ex eb I Mb*
COMPLIANCE STANDARDS	EN 60079-0,1,7,15,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,15,31
cCSAus CERTIFICATE	2288626		
CSAus CODE OF PROTECTION***	Class I, Div 1 and 2, Groups A,B,C, and D; Class II, Div 1 and 2, Groups E, F, and G; Class III, Div 1 and 2; Type 4X; Oil Resistance II; Class I, Zone 1, AEx d IIC Gb, AEx e IIC Gb; Class I, Zone 2, AEx nR IIC Gc; Class I, Zone 20, AEx ta IIIC Da		
cCSA CODE OF PROTECTION***	Class I, Div 1 and 2, Groups A,B,C, and D; Class II, Div 1 and 2, Groups E, F and G; Class III, Div 1 and 2; Type 4X; Oil Resistance II; Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da		
COMPLIANCE STANDARDS	CAN/CSA-C22.2 No. 0,18,25,30,174,94; CAN/CSA-60079-0,1,7,15,31; CAN/CSA-E61241-1; ANS/UL 514B, ANS/UL 50, ANS/UL 2225, UL60079-0, 1, 7, 15		
cULus CERTIFICATE (20S-90)	E201187, E161256		
CODE OF PROTECTION**	Class I, Div 1 and 2, Groups A, B, C, and D; Class II, Div 1 and 2, Groups F and G		
UL CERTIFICATE (20S-90)	E253914		
CODE OF PROTECTION**	Class I, Zone 1, AEx d IIC, AEx e II		
COMPLIANCE STANDARDS	UL 2225, UL 514B, UL 60079-0, UL 60079-7, CSA C22.2 No. 174		
KCS KOSHA CERTIFICATE	14-GA4BO-0252X	ECAS CERTIFICATE	20-02-05624
EAC CERTIFICATE	Check website for latest certificate number	Ukr SEPPO CERTIFICATE	СЦ 19.0371X
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
CCC CERTIFICATE	2020322313003190	INMETRO APPROVAL	TUV 12.2073X
SANS	IA MS-XPL21962 21.0305X		
MARINE APPROVALS	LRS: 01/00172, DNV: TAE000000Y, ABS: 20-LD1948801-PDA, BV: 43180		

TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Type B
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
INGRESS PROTECTION RATING**	IP66, IP67 and IP68****
NEMA RATING**	Type 4X
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE TYPE	Unarmoured***
SEAL MATERIAL	SOLO LSF Halogen Free Thermoset Elastomer / Epoxy Barrier Compound
SEALING TECHNIQUE	Displacement Seal
SEALING AREA(S)	Inner Compound Barrier and Outer Sheath
CABLE GLAND MATERIAL	Brass, Electroless Nickel Plated Brass, Stainless Steel, Aluminium

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444
 Where the cable is permitted by code (NEC and/or CEC) * IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request.

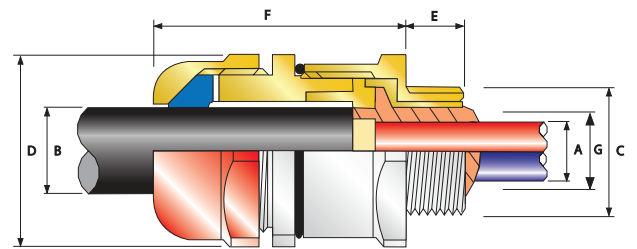

*Aluminium alloys are not permitted in Group I mining applications
 **Where the cable is permitted by code (NEC and/or CEC)



EUTEX ORDERING REFERENCE	AVAILABLE ENTRY THREADS 'C' (ALTERNATIVE METRIC THREAD LENGTHS AVAILABLE)					NUMBER OF CORES	DIAMETER OVER CONDUCTORS 'A'	CABLE BEDDING DIAMETER 'G'	OVERALL CABLE DIAMETER 'B'		ACROSS FLATS 'D'		ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
	STANDARD		OPTION						MIN	MAX	MAX	MAX				
	METRIC	MIN THREAD LENGTH (METRIC) 'E'	NPT	THREAD LENGTH (NPT) 'E'	NPT											
20S16 PXSS2K	M20	15.0	1/2"	19.9	3/4"	21	8.6	8.6	3.1	8.6	30.0	33.0	53.1	PVC06	0.20	
20S PXSS2K	M20	15.0	1/2"	19.9	3/4"	21	11.7	11.7	6.1	11.7	30.0	33.0	53.1	PVC06	0.20	
20 PXSS2K	M20	15.0	1/2"	19.9	3/4"	21	12.6	12.9	6.5	14.0	30.0	33.0	54.2	PVC06	0.20	
20L PXSS2K	M20	15.0	1/2"	19.9	3/4"	21	12.6	12.9	10.0	15.9	30.0	33.0	54.2	PVC06	0.20	
25 PXSS2K	M25	15.0	3/4"	20.2	1"	30	17.5	17.9	11.1	20.0	36.0	39.6	60.0	PVC09	0.33	
32 PXSS2K	M32	15.0	1"	25.0	1 1/4"	38	23.6	23.9	17.0	26.3	41.0	45.1	61.1	PVC10	0.59	
32L PXSS2K	M32	15.0	1"	25.0	1 1/4"	38	23.6	23.9	20.0	27.4	41.0	45.1	61.1	PVC10	0.59	
40 PXSS2K	M40	15.0	1 1/4"	25.6	1 1/2"	59	30.0	30.3	22.0	32.1	50.0	55.0	62.4	PVC13	0.56	
50S PXSS2K	M50	15.0	1 1/2"	26.1	2"	89	36.6	36.9	29.5	38.2	55.0	60.5	65.2	PVC15	0.66	
50 PXSS2K	M50	15.0	2"	26.9	2 1/2"	115	41.0	41.3	35.6	44.0	60.0	66.0	67.6	PVC18	0.73	
63S PXSS2K	M63	15.0	2"	26.9	2 1/2"	115	47.9	48.4	40.1	49.9	70.0	77.0	71.1	PVC21	1.07	
63 PXSS2K	M63	15.0	2 1/2"	39.9	3"	115	53.7	54.0	47.2	55.9	75.0	82.5	70.4	PVC23	1.06	
75S PXSS2K	M75	15.0	2 1/2"	39.9	3"	140	59.9	60.2	52.8	61.9	80.0	88.0	75.3	PVC25	1.30	
75 PXSS2K	M75	15.0	3"	41.5	3 1/2"	140	64.3	64.2	59.1	67.9	85.0	93.5	74.9	PVC27	1.30	
90 PXSS2K	M90	20.0	3 1/2"	42.8	4"	140	75.3	75.6	66.6	79.4	108.0	118.8	94.8	PVC31	3.02	
100 PXSS2K	M100	20.0	3 1/2"	42.8	4"	200	83.6	85.9	76.0	90.9	123.0	135.3	86.3	LSF33	4.00	

*For material options add the following suffix to the ordering reference; Brass (no suffix required), Nickel Plated Brass 'S', 316 Grade Stainless Steel '4', Copper Free Aluminium '1'
 For NPT options add the following digits to the material suffix; 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/4" = 34; 1 1/2" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')
 Examples: 32PXSS2KIRA534 = Nickel Plated Brass 1 1/2" NPT, 50SPXSS2KIRA035 = Brass 1 1/2" NPT, 25PXSS2KIRA432 = Stainless Steel 3/4" NPT, 20PXSS2KIRA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary.