

**TRITON CDS (T3CDS) GLOBALLY APPROVED, EXPLOSIVE
ATMOSPHERE CABLE GLAND**



FOR ALL TYPES OF ARMoured CABLES

- Fully sequential, three step installation procedure
- Reduces installation times, cost and risk
- Direct and remote installation
- Unique compensating displacement seal system (CDS)
- Metal-to-metal installation every time regardless of cable diameter
- Designed to reduce the effects of coldflow.
- Integral protected deluge seal
- Controlled outer load retention seal
- Unique OSTG prevents over tightening
- -60°C to +130°C (standard),
- Globally marked, UL, cCSAus, IECEx, ATEX and UKEX




GLOBAL PRODUCT CERTIFICATION			
ATEX CERTIFICATE	CML18ATEX1326X, CML18ATEX4318X	IECEx CERTIFICATE	IECEx CML 18.0183X
UKEX CERTIFICATE	CML 21UKEX1258X, CML 21UKEX4259X		
CODE OF PROTECTION	⊕ II 2G 1D, Ex db IIC Gb, Ex eb IIC Gb, Ex ta IIIC Da ⊕ II 3G, Ex nR IIC Gc ⊕ I M2, Ex db I Mb*, Ex eb I Mb*	CODE OF PROTECTION	Ex db IIC Gb, Ex eb IIC Gb, Ex nR IIC Gc, Ex ta IIIC Da, Ex db I Mb*, Ex eb I Mb*
COMPLIANCE STANDARDS	EN 60079-0,1,7,15,31	COMPLIANCE STANDARDS	IEC 60079-0,1,7,15,31
cCSAus CERTIFICATE (20s16 - 90)	1310517		
CSAus CODE OF PROTECTION	Class II, Div 2, Groups E, F, and G; Class III, Div 1 and 2; Enclosure Type 4X; Oil Resistance II; Class I, Zone 1, AEx e II, AEx nR II		
cCSA CODE OF PROTECTION	Class I, Div 2, Groups A, B, C, and D; Class II, Div 2, Groups E, F, and G; Class III, Div 1 and 2; Enclosure Types 3, 4, and 4X; Ex d IIC, Ex e II, Ex nR II		
COMPLIANCE STANDARDS	CSA-C22.2 No 0, 18, 25, 30, 94, 174, CSA C22.2 No 60079-0,1,7,15; ANSI/UL 514B, 50, 2225; UL60079-0,1,7,15		
UL CERTIFICATE (20s16 - 90)	E256367		
CODE OF PROTECTION	Class I, Zone 1, AEx e II		
COMPLIANCE STANDARDS	UL 50, 514B, 2225; EN 50014,60529; CSA C22.2 No. 174		
ECAS CERTIFICATE	20-02-05626	UkrSEPRO CERTIFICATE	CUJ 19.0371X
EAC CERTIFICATE	Check website for latest certificate number (excl. ThermEx)		
CODE OF PROTECTION	IEx d IIC Gb X, IEx e IIC Gb X, 2Ex nR IIC Gc X, Ex ta IIIC Da X, IP66, IP67, IP68		
RETIE APPROVAL NUMBER	03866	CCOE / PESO (INDIA) CERTIFICATE	P444949
CCC CERTIFICATE	2020322313002527	INMETRO APPROVAL	TUV 11.0374X
SANS	IA MS-XPL21804 21.0011X		
MARINE APPROVALS	LRS: 01/00172, DNV: TAE00000Y, ABS: 20-LD1948801-PDA, BV: 43180		

Aluminium alloys are not permitted in Group I mining applications



TECHNICAL CLASSIFICATION	
DESIGN SPECIFICATION	BS 6121:Part 1:1989, IEC 62444, EN 62444
MECHANICAL CLASSIFICATION*	Impact = Level 8, Cable Anchorage = Type D
ENCLOSURE PROTECTION	IK10 to IEC 62262 (20 joules) Brass and Stainless Steel only
ELECTRICAL CLASSIFICATION	Category B (Category A when used with braid, tape or pliable wire armour cables)
NEMA RATING**	Type 4X
INGRESS PROTECTION RATING**	IP66, IP67 and IP68***
DELUGE PROTECTION COMPLIANCE	DTS01 : 91
CABLE GLAND MATERIAL	Electroless Nickel Plated Brass, Copper Free (<0.4%) Aluminium, Stainless Steel
SEAL MATERIAL	SOLO LSF Halogen Free Thermoset Elastomer
CABLE TYPE	Steel / Served Wire Armour (SWA), Aluminium Wire Armour (AWA), Pliable Wire Armour (PWA), Steel Tape Armour (STA), Aluminium Strip Armour (ASA), Screened Flexible (EMC) Wire Braid (e.g. CY/SY), Wire Braid Armour (e.g. SWB)
ARMOUR CLAMPING	Reversible Armour Cone and AnyWay Universal Clamping Ring
SEALING TECHNIQUE	Inner Compensating Displacement Seal and Outer Load Retention Seal
SEALING AREA(S)	Cable Inner Bedding and Outer Cable Sheath

* Mechanical and Electrical Classifications applied as per IEC 62444 and EN 62444
 *** IP68 tested to a minimum depth of 30 metres for 12 hours, alternative depths / durations can be provided upon request

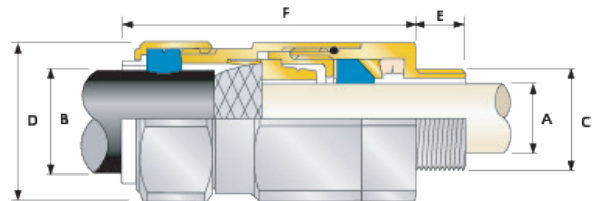

† Grooved Cone (X) is predominantly used for Wire Braid (e.g. GSWB, TCWB), Steel Tape Armour (STA, DSTA) and Aluminum Strip Armour (ASA) but is also suitable for Single Wire Armour (SWA), Aluminum Wire Armour (AWA) and Pliable Wire Armour (PWA) if the range is outside that of the Stepped Cone (W). Grooved Cone (X) dimensions shown in the Cable Gland Selection Table below are for a double wire strand of braid armour cables. Tapes can also be doubled over. For cables that have only a single layer of armour such as SWA the clamping range should be used as shown in the table below. Stepped (W) Cone is suitable for Single Wire Armour (SWA), or Aluminum Wire Armour (AWA) cables.

EUTEX ORDERING REFERENCE	AVAILABLE ENTRY THREADS 'C'		CABLE BEDDING DIAMETER 'A'		OVERALL CABLE DIAMETER 'B'		ARMOUR RANGE †				ACROSS FLATS 'D'	ACROSS CORNERS 'D'	PROTRUSION LENGTH 'F'	SHROUD	CABLE GLAND WEIGHT (kg)
	METRIC	MINIMUM THREAD LENGTH 'E'	MIN	MAX	MIN	MAX	GROOVED CONE (X)		STEPPED CONE (W)						
							MIN	MAX	MIN	MAX					
20S16 T3CDS	M20	15.0	3.1	8.6	6.1	13.1	0.3	1.0	0.8	1.25	24.0	26.4	78.7	PVC36	0.18
20S T3CDS	M20	15.0	6.1	11.6	9.5	15.9	0.3	1.0	0.8	1.25	24.0	26.4	78.7	PVC36	0.20
20 T3CDS	M20	15.0	6.5	13.9	12.5	20.9	0.4	1.0	0.8	1.25	30.5	33.6	76.2	PVC06	0.28
25S T3CDS	M25	15.0	11.1	19.9	14.0	22.0	0.4	1.2	1.25	1.6	37.5	41.3	88.8	PVC09	0.44
25 T3CDS	M25	15.0	11.1	19.9	18.2	26.2	0.4	1.2	1.25	1.6	37.5	41.3	88.7	PVC09	0.44
32 T3CDS	M32	15.0	17.0	26.2	23.7	33.9	0.4	1.2	1.6	2.0	46.0	50.6	90.7	PVC11	0.63
40 T3CDS	M40	15.0	22.0	32.1	27.9	40.4	0.4	1.6	1.6	2.0	55.0	60.5	93.2	PVC15	0.91
50S T3CDS	M50	15.0	29.5	38.1	35.2	46.7	0.4	1.6	2.0	2.5	60.0	66.0	100.7	PVC18	1.12
50 T3CDS	M50	15.0	35.6	44.0	40.4	53.0	0.6	1.6	2.0	2.5	70.1	77.1	105.8	PVC21	1.60
63S T3CDS	M63	15.0	40.1	49.9	45.6	59.4	0.6	1.6	2.0	2.5	75.0	82.5	102.5	PVC23	1.73
63 T3CDS	M63	15.0	47.2	55.9	54.6	65.8	0.6	1.6	2.0	2.5	80.0	88.0	105.4	PVC25	1.78
75S T3CDS	M75	15.0	52.8	61.9	59.0	72.0	0.6	1.6	2.0	2.5	90.0	99.0	110.6	PVC28	2.57
75 T3CDS	M75	15.0	59.1	67.9	66.7	78.4	0.6	1.6	2.5	3.0	100.0	110.0	120.3	PVC30	3.33
90 T3CDS	M90	24.0	66.6	78.6	76.2	90.3	0.8	1.6	3.15	4.0	115.0	126.5	138.9	PVC32	4.87
100 T3CDS	M100	24.0	76.0	90.9	86.1	101.4	0.8	1.6	3.15	4.0	127.0	139.7	128.2	LSF33	4.97
115 T3CDS	M115	24.0	86.0	97.9	101.5	110.2	0.8	1.6	3.15	4.0	138.0	151.8	161.3	LSF34	7.72
130 T3CDS	M130	24.0	97.0	114.9	110.2	123.2	0.8	1.6	3.15	4.0	157.0	172.7	173.3	LSF35	9.78

For material options add the following suffix to the ordering reference, Brass (no suffix required); Nickel Plated Brass '5'; 316 Grade Stainless Steel '4'; Copper Free Aluminium '1'
 For NPT options add the following digits to the material suffix: 1/2" = 31; 3/4" = 32; 1" = 33; 1 1/2" = 34; 1 3/4" = 35; 2" = 36; 2 1/2" = 37; 3" = 38; 3 1/2" = 39; 4" = 310 (Brass requires prefix '0')

Examples: 32T3CDSIRA534 = Nickel Plated Brass 1 1/2" NPT, 50S13CDSIRA035 = Brass 1 1/2" NPT, 25T3CDSIRA432 = Stainless Steel 3/4" NPT, 20T3CDSPIRA5 = Nickel Plated Brass M20

Dimensions are displayed in millimetres unless otherwise stated

Dimensions listed are for metric cable glands only. Dimensions for alternative threads may vary.