

# ENTRY THREAD SEALING WASHERS

## ENTRY THREAD SEALING WASHERS

To maintain the ingress protection rating between the equipment and the cable gland, it may be necessary to fit an entry thread sealing washer at the equipment-to-gland entry interface. For installations it is equally essential to maintain the ingress protection integrity to which the equipment has been rated.

The need for a sealing washer will depend on the ingress protection rating, code of protection of the equipment and the type of entry holes available within that equipment.

The metric entry thread sealing washers are produced in 2mm thick white nylon\* as standard which are recommended and meet the specified requirements of Shell's offshore operations (Deluge DTS01 : 91). To verify the effectiveness of the nylon entry sealing washers, independent third-party tests to IEC 60529 have been successfully conducted on cable glands at IP66, IP67 and IP68 levels of protection. Documentary evidence of such tests to the highest standards can be provided.

NPT entry thread sealing washers are produced in 2mm thick nylon and are colour coded green for identification purposes.

All nylon entry thread sealing washers have an operating temperature range of -60°C to +130°C; for the purpose of installation, this may be restricted by, or exceeded by the operating temperature of the cable gland or cable accessory used, and care should be taken to observe the constraining temperature(s).

Should the operating temperature of the nylon entry thread sealing washer not be suitable for any particular installation, please contact EUTEX for an alternative solution.

Red fibre washers can also be supplied to order but careful consideration should be given to their use in sub-zero climates where absorption, freezing and cracking may occur. These red fibre washers can be ordered by substituting 'ETS' with 'FW' in the below tables.

EUTEX also offers cable glands and accessories with an equipment interface 'O' ring seal as an alternative.

\*Please note that nylon entry thread seals are not suitable for use with the TruSeal cable gland range or 717 Series Stopper Plugs. Alternative entry thread seals are provided as standard with all TruSeal cable glands and as an optional extra with 717 Series Stopper Plugs.


### WHITE METRIC ENTRY THREAD SEALING WASHERS

EUTEX ORDERING REFERENCE (METRIC)	REFERENCE DIAMETER 'A'	MINIMUM THICKNESS	EXTERNAL DIAMETER 'B'
16ETS2	M16	2.0	25.8
20ETS2	M20	2.0	28.3
25ETS2	M25	2.0	34.45
32ETS2	M32	2.0	44.2
40ETS2	M40	2.0	52.8
50ETS2	M50	2.0	64.8
63ETS2	M63	2.0	77.9
75ETS2	M75	2.0	95.9
90ETS2	M90	2.0	110.6
100ETS2	M100	2.0	120.7

### GREEN NPT ENTRY THREAD SEALING WASHERS

EUTEX ORDERING REFERENCE NPT	REFERENCE DIAMETER 'A'	MINIMUM THICKNESS	EXTERNAL DIAMETER 'B'
050NPTETS	½" NPT	2.0	29.65
075NPTETS	¾" NPT	2.0	34.4
100NPTETS	1" NPT	2.0	44.4
125NPTETS	1 ¼" NPT	2.0	55.9
150NPTETS	1 ½" NPT	2.0	64.8
200NPTETS	2" NPT	2.0	77.6
250NPTETS	2 ½" NPT	2.0	95.9
300NPTETS	3" NPT	2.0	110.6
350NPTETS	3 ½" NPT	2.0	120.7
400NPTETS	4" NPT	2.0	137.0

Dimensions shown are in mm unless otherwise stated

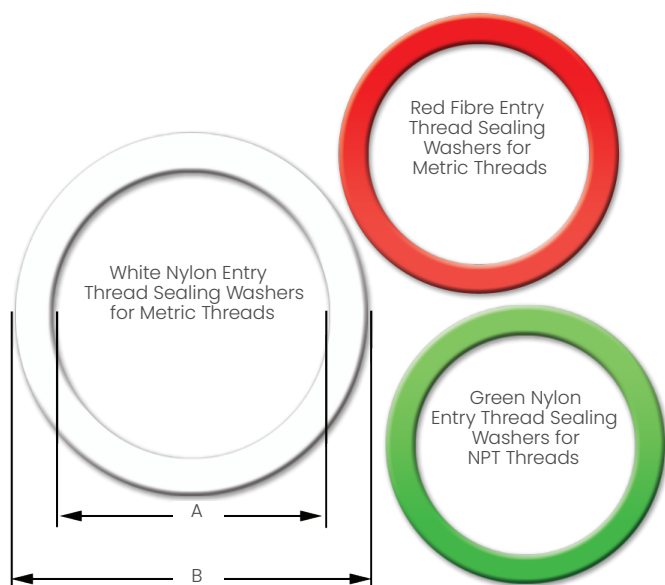

Dimensions listed are for metric accessories only. Dimensions for alternative threads may vary.